



MAINTENANCE

Safety Instructions: The Loading disc is always under spring tension!
Remove only the magazine head!

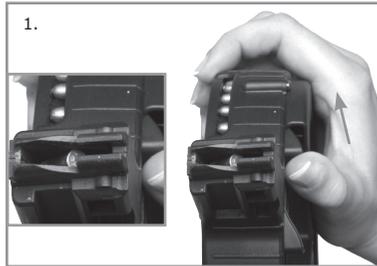

1. Hold the loading disc with your thumb.

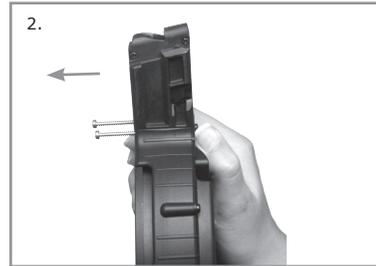


2. Remove the screws from the magazine head.




3. Remove the magazine head forward.



4. **Attention:**
Loading Disc is under
spring tension!
Release the loading disc slowly by stopping
with your thumb.

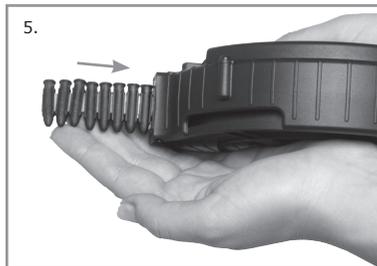

5. Insert again the carrier into the housing.

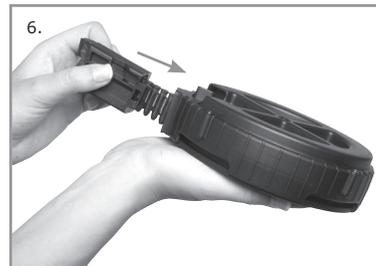

6. Assemble the magazine head.

CLEANING

After removal of the magazine you can remove powder fouling and dirt with the help of standard brushes and cloths.

G S G ROTARY MAGAZINE

BEDIENUNGSANLEITUNG INSTRUCTION MANUAL



German Sport Guns GmbH
Oesterweg 21 · D-59469 Ense-Höingen
Tel. +49 (0) 2938 97837-0 · Fax.: +49 (0) 2938 97837-130
www.germansportguns.de · info@germansportguns.de

G S G ROTARY MAGAZINE

If the loading disc jams,
spray gunoil here!



ATTENTION!

Best performance is obtained by non waxed
.22lr ammunition such as:

Remington Viper
Federal Champion (Bulk Pack)
Federal American Eagle
Winchester Super Speed

A regular cleaning of the gun as well as an
occasional oiling of the Rotary Magazine with
non-resinous oil is recommended to ensure
a safe and faultless shooting. The magazine
head can be cleaned carefully on the top with
a gun brush.

WARNING!

The use of chlorinated solvents and those
containing acetone may damage the exterior
finish of your GSG Rotary Magazine.

**We suggest the use of petroleum based
products for the cleaning, preserving and
lubricating of your Rotary Magazine,
similar to WD-40.**

LOADING

Use only highquality ammunition!




Take the magazine in your **right** hand.


Attention: Do not turn the loading disc, when the magazine is empty!



Place the cartridge in the front area of the magazine head.

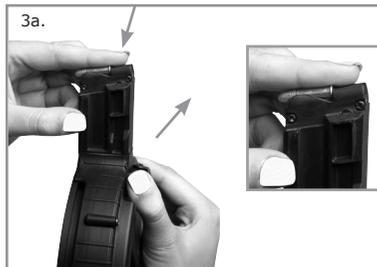

Put light pressure on the loading disc and the cartridge.

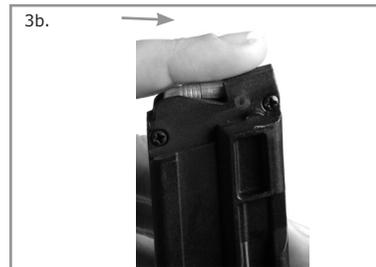

Repeat the procedure until the desired quantity of cartridges is loaded. (max. 110 pcs.)

Service & Distribution United States of America
American Tactical Imports Inc.
100 Airpark Drive · Rochester, NY 14624
Phone: 585.328.2212 · Fax: 585.328.8184
www.americantactical.us · sales@americantactical.us

FIRING



Attention: The ejection port must be always opened and locked, when you insert the magazine.



Insert the magazine until it snaps.



Let the cocking tube **slide** forward.



Attention: Do not hold the magazine when firing!



Attention!
The ejection port is closed after the last shot. Before removing the magazine, open and lock the ejection port to check that there is no cartridge in the chamber.



Remove the magazine: **1.** Standard Remove by pushing the magazine release lever. **2.** When the magazine release lever is in opposition to the nose of the loading disc (pic. 1), push the magazine release button on the right side (pic. 2)